

LIVALL

BH6X&MT


BH6X + MT Series Quick Start Guide

www.livall.com



I.Introduction

Thank you for choosing the LIVALL Smart Helmet. This Guide will instruct you on how to use this product. LIVALL follows the strategy of sustainable development. This Manual will be updated from time to time. If you need more detailed instructions, please see the "Important Information and Warranty Card" annex. You can also learn more about the helmet on LIVALL's official website.

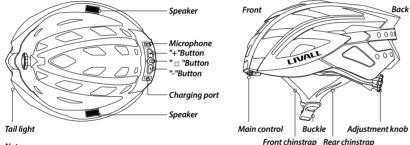

Front chinstrap Rear chinstrap Note:

The picture is for reference only. If the actual product appears different from the picture, the real product shall prevail.

II. Packing List

Helmet x 1 Ouick Start Guide x 1 Magnet USB charging cable x 1

Bling remote controller x 1 Important Information and Warranty Card x 1

III. Wearing Instructions Incorrect Adjust the length of the chinstrap









as one finger








Check whether the buckle is properly fastened

IV. Operating Instructions (Please charge the battery before use.)

Start-Up



Press the "

" button for 3-to-5 seconds




You will hear a voice saying "POWER ON".




The orange tail light will blink twice indicating Start-Up was successful.

Change the language of the voice prompt

(the default language is English)
To switch the language of the voice
prompt, follow the procedure below
when in normal standby mode and
disconnected from a phone(currently
only English and Chinese are
supported).



First hold the "-" button




Then press the "+" button to switch between languages.


Connecting for the first time or switching devices

One helmet can be connected to up to three LIVALL-authorized devices at the same time. After the handlebar remote control is connected, press the "left" or "right" button to control the helmet's corresponding indicator light.

1. Connecting for the first time




be within 5 meters of the helmet.
It will automatically connect the helmet.



After the connection is established, it will be confirmed with two "beeps".

2. Replacing device




Place a device that is already ON near the helmet's main control.




When the warming light flashes and the helmet speakers emit two "beeps", it indicates that there is a device nearby requiring connection to the helmet.


Two "beeps"



Press the " \square " button on the helmet within 10 seconds after you hear the beeps and confirm connection to the device.


Connect to the phone (Tip: Once connected, it can control the music player as well as make and receive calls. To ensure the stability of the connection, please try to position your mobile phone in front of you.)







Swith on the Bluetooth on your phone and scan for the "Helmet Headset" device.



Click to connect. The speakers on both sides will make the "Connected" sound when the connection is completed.

After the connection is completed, you can play music as well as make and answer calls as follows

To Play/Pause Music: Press the "□" button on the helmet or the handlebar remote control to play/pause music.

Adjust Volume: When calls are made or music is played, press the "+/-" buttons on the helmet to adjust the

speaker volume.

Previous Song/Next Song: Press the "up/down" buttons on the handlebar remote control or press and hold "+/-" buttons on the helmet to cycle through the music.

Answer/Reject Calls: When there's an incoming call, press the " \Box " button to answer the call or press and hold to

hang up.

Two quick presses of the " - " button on the handlebar remote control or helmet to redial the last outgoing call.

 \Rightarrow

Connect LIVALL Riding phone App
(for use the Walkie-Talkie function and take photos)




For Android: Start LIVALL Riding. The App will automatically connect to the helmet;



For IOS: Follow LIVALL Riding guide to connect to the helmet.

Only if the helmet is successfully connected to LIVALL APP, SOS alert feature and LED light indicators can work.

Power Off



Press and hold the " $\ \square$ " function button for 3 seconds.




You will hear "POWER OFF".



The tail light will flash once in orange indicating the helmet is POWERED OFF.


Dial Back:

Charging




To charge

Plug the USB charging cable into the USB port on the helmet. The tail charging light is illuminated in red, indicating that the helmet is being charged.



Charging time

It is recommended that the power of the charger is no less than 0.5A. Charging time takes about 3hours.



Charging complete

When the charging indicator light turns off, it indicates that charging is complete.

V. Considerations

- 1. The helmet contains electronic parts inside. Please do not take a long ride in the rain although the helmet can prevent the rain from splashing.
- 2. After the helmet gets wet in the rain, the water droplets might occur in the chimney of tail LED lights. The water droplets will disappear when you put the helmet under the ventilation environment for 1-2 days. 3. The helmet contains the battery of 3.7V/600mAh. The battery capacity varies with temperature change. The
- battery life can decay when the helmet is used at low temperatures or below Zero degrees Celsius.
- If the electronic functions do not work, please charge the helmet for 3 hours and then check if it works normally.
- 5. The helmet contains impact detection devices. Only if you connect your helmet with LIVALL APP, start ride mode on the APP and your helmet suffers from the heavy impact, SOS alert feature can be triggered. Your emergency contacts set on LIVALL APP can accordingly receive your SOS messages.

VI. Technical Specifications

Bluetooth: BT 4.1 + HFP/HSP/A2DP

Bluetooth distance: Max. 10 meters

Charging port: Magnet USB Charging cable

Electricity parameter: DC 5V/0.5A Charging time: 3 hours

Battery life: The max. battery life of the light is 10 hours. Listening

time for music is 3-to-6 hours.

Standby duration: Max. 180 days

Temperature for use: 0°C~40°C. Temperature:

Recommended temperature for storage: -20~45°C



LIVALL Riding APP



LIVALL's website: www.livall.com

Performance standards:

USA: CPSC1203:1998, FCC Part 15 Rules

Europe: EN 62479:2010, EN 301 489-1 V1.9.2 (2011-09), EN 301 489-17 V2.2.1 (2012-09),

EN 300 328 V1.8.1 2012-06, EN 60950-1:2006+A11:2009+A1:2010+A12:2011

Australia: AS/NZS 2063:2008+A1:2009, AS/NZS CISPR 22:2009+A1:2010, AS/NZS 4268:

2012+A1:2013, Radiation Protection Series Publication No. 3

That the helmet can only protect if it fits well and that the buyer should try different sizes and choose the size
which feels secure and comfortable on the head.

- That the helmet should be adjusted to fit the user e.g. the straps positioned so that they do not cover the ears, the buckle positioned away from the jawbone and the straps and buckle adjusted to be both comfortable and firm.
- How the helmet should be position on the head to ensure the intended protection is provided (e.g. that it
 should be placed so as to protect the forehead and not be pushed too far over the back of the head.
- That a helmet cannot always protect against injury.
- That a helmet subjected to a severe impact should be discarded and destroyed.
- A statement of the danger of modifying or removing any of the original component parts of the helmet other
 than as recommended by the manufacturer, and that helmets should not be adapted for the purpose of
 fitting accessories in a way not recommended by the manufacturer







BH6X-QA-V2.0

10 11